


The Union Jack flag is partially visible on the left side of the image, behind the word BAILCAST.

# **BAILCAST**

**MADE IN BRITAIN TRUSTED GLOBALLY**

**Duragun**  
**pro**

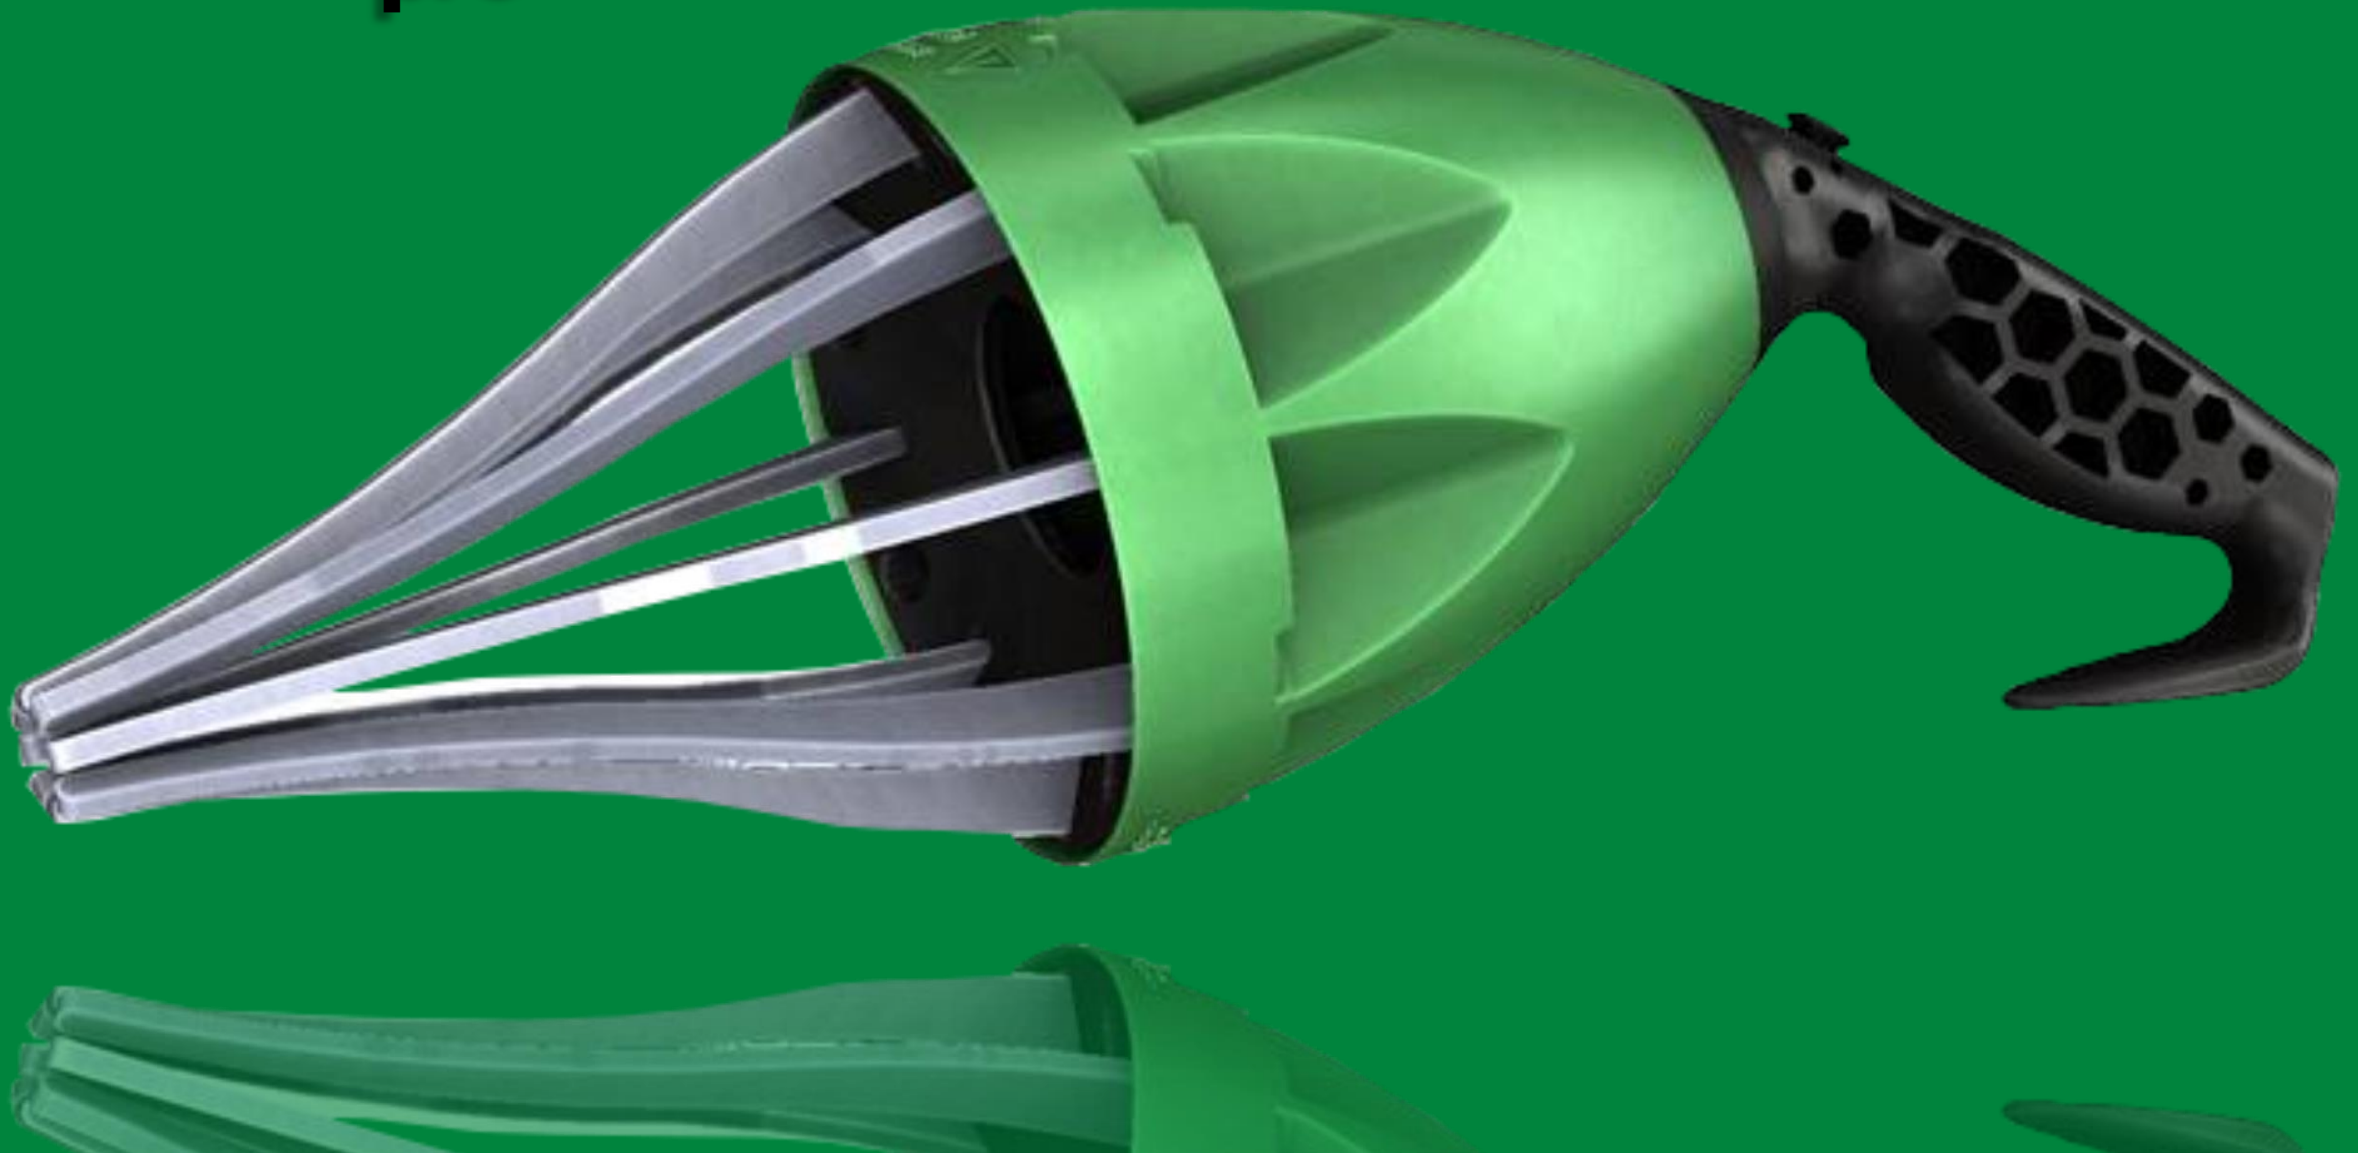

# Duragun pro

The only tool you'll need

Single 2-way air switch

(Reduces operational weight and removes potential air line trip hazard)

Ergonomic Handle

(Less strain to wrist and arm)

Anti-Slip grip

(Less chance of being dropped)

Hand guard

(Helps protect hand from knocks)

Belt hook / Stand

(Keeps the tool stable and prevents the tool from rolling on to the floor)

Wider opening arms\*

(Enables larger joints to be fitted without the need of an additional tool)

\*155mm Unloaded opening, without a boot on the arms.

With a boot on the arms the pneumatic opening is limited to a maximum of 125mm, the same as Duragun, to prevent smaller boots splitting by over stretching. Larger boots can be manually expanded by pushing the tool over the joint.



MADE IN BRITAIN



# Duragun pro

155mm\* ~ 130mm\*

# Duragun



\*155mm Unloaded opening, without a boot on the arms.  
With a boot on the arms the pneumatic opening is limited to a maximum of 125mm, the same as Duragun, to prevent smaller boots splitting by over stretching. Larger boots can be manually expanded by pushing the tool over the joint



CE  
UK  
CA

**1. Product model / product:**

Product: CV Boot Application Tool  
Model/type: DURAGUNPRO  
Serial no. range: 220000 - 229999

**2. Manufacturer:**


Name: Bailcast Ltd  
Address: Unit 8 Chorley North Industrial Park, Chorley, Lancashire  
PR6 7BX United Kingdom

**3. This declaration is issued under the sole responsibility of the manufacturer.**

**4. Object of the declaration:**

Product: A pneumatically powered device  
used to fit Bailcast™ stretchy  
Universal and Duraboot® CV  
boots onto drive-shaft  
assemblies.

With inbuilt, self-resetting  
pressure relief valve.

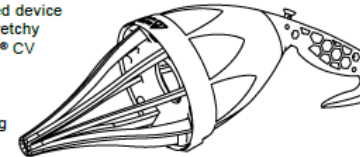

Specification: Air supply 4-8 bar (Max 9 bar)

**5. The object of the declaration described above is in conformity with the relevant Union harmonisation legislation:**

2006/42/EC | The Machinery Directive

**6. References to the relevant harmonised standards used or references to the other technical specifications in relation to which conformity is declared:**

EN ISO 12100 : 2010 | Safety of machinery. General principles for design. Risk assessment and risk reduction

EN ISO 4414 : 2010 | Pneumatic fluid power. General rules and safety requirements for systems and their components

**7. Additional information:**

The technical documentation for the machinery is available from:

Name: Insert Name  
Address: Insert Address

**Signed for and on behalf of Bailcast Ltd**

Place of issue: Chorley, United Kingdom  
Name: David Hartley  
Function: Director  
Date of issue: 1<sup>st</sup> January 2022

Signature:




on Tool

North Industrial Park, Chorley, Lancashire  
United Kingdom

sole responsibility of the manufacturer.

pneumatically powered device  
Bailcast™ stretchy  
Duraboot® CV  
boots onto drive-shaft

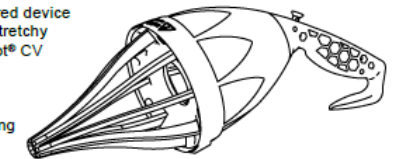

self-resetting  
pressure relief valve.

(Max 9 bar)

described above is in conformity with the relevant  
harmonised standards (amendments):

Machinery (Safety) Regulations 2008

relevant standards used or references to the other  
technical specifications in relation to which conformity is declared:

EN ISO 12100 : 2010. General principles for design. Risk assessment and risk reduction

EN ISO 4414 : 2010. General rules and safety requirements for systems and their components

The machinery is available from:

Unit 8 North Industrial Park, Chorley, Lancashire PR6 7BX

Bailcast Ltd  
United Kingdom


Signature:



 **BAILCAST**

MADE IN BRITAIN TRUSTED GLOBALLY

**5**



**YEAR**

**WARRANTY**

Technical drawing of a circular duct assembly, showing multiple views and dimensions. The drawing includes a top view, a side view, and a cross-section view. The top view shows a circular duct with a central hole and four mounting points. The side view shows the duct's profile with a diameter of 44.20. The cross-section view shows the internal structure with a diameter of 56.88 and a height of 28.72. The drawing is labeled with 'BAILCAST' and 'MADE IN BRITAIN TRUSTED GLOBALLY'.

ALL DIMENSIONS ON FINISHED PRODUCT MUST MATCH DIMENSIONS ON DRAWINGS  
OTHER DEFAULT METRIC UNITS PRESCRIPTION  
IF IN DOUBT ASK

THIRD ANGLE PROJECTION



Dimensions shown:

- Top view: 8, 7, 6, 5, 4, 3, 2, 1
- Side view:  $\varnothing 44.20$
- Cross-section view: 56.88, 28.72, 39.95

Labels:

- F
- E
- F
- D
- C
- B
- A


Logo: BAILCAST  
MADE IN BRITAIN TRUSTED GLOBALLY

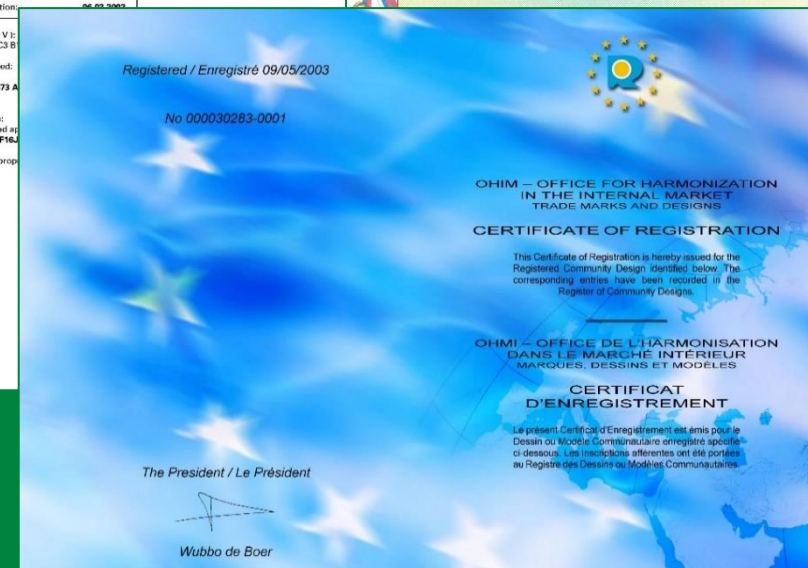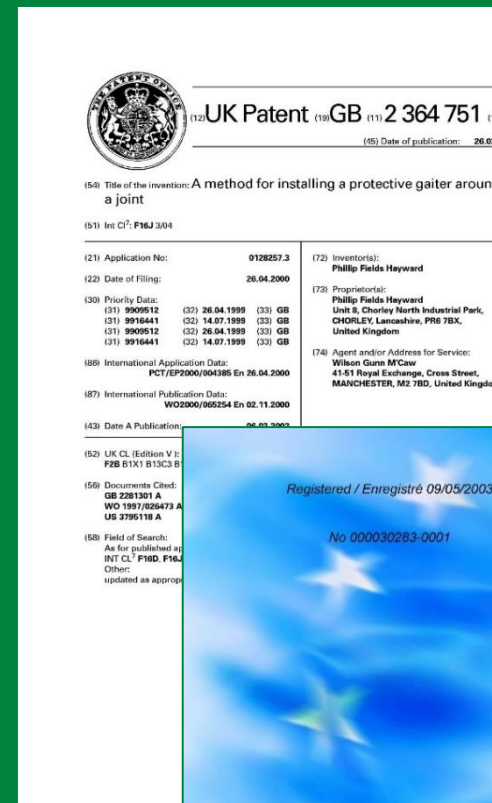

## 3 Patents



# Made in Britain

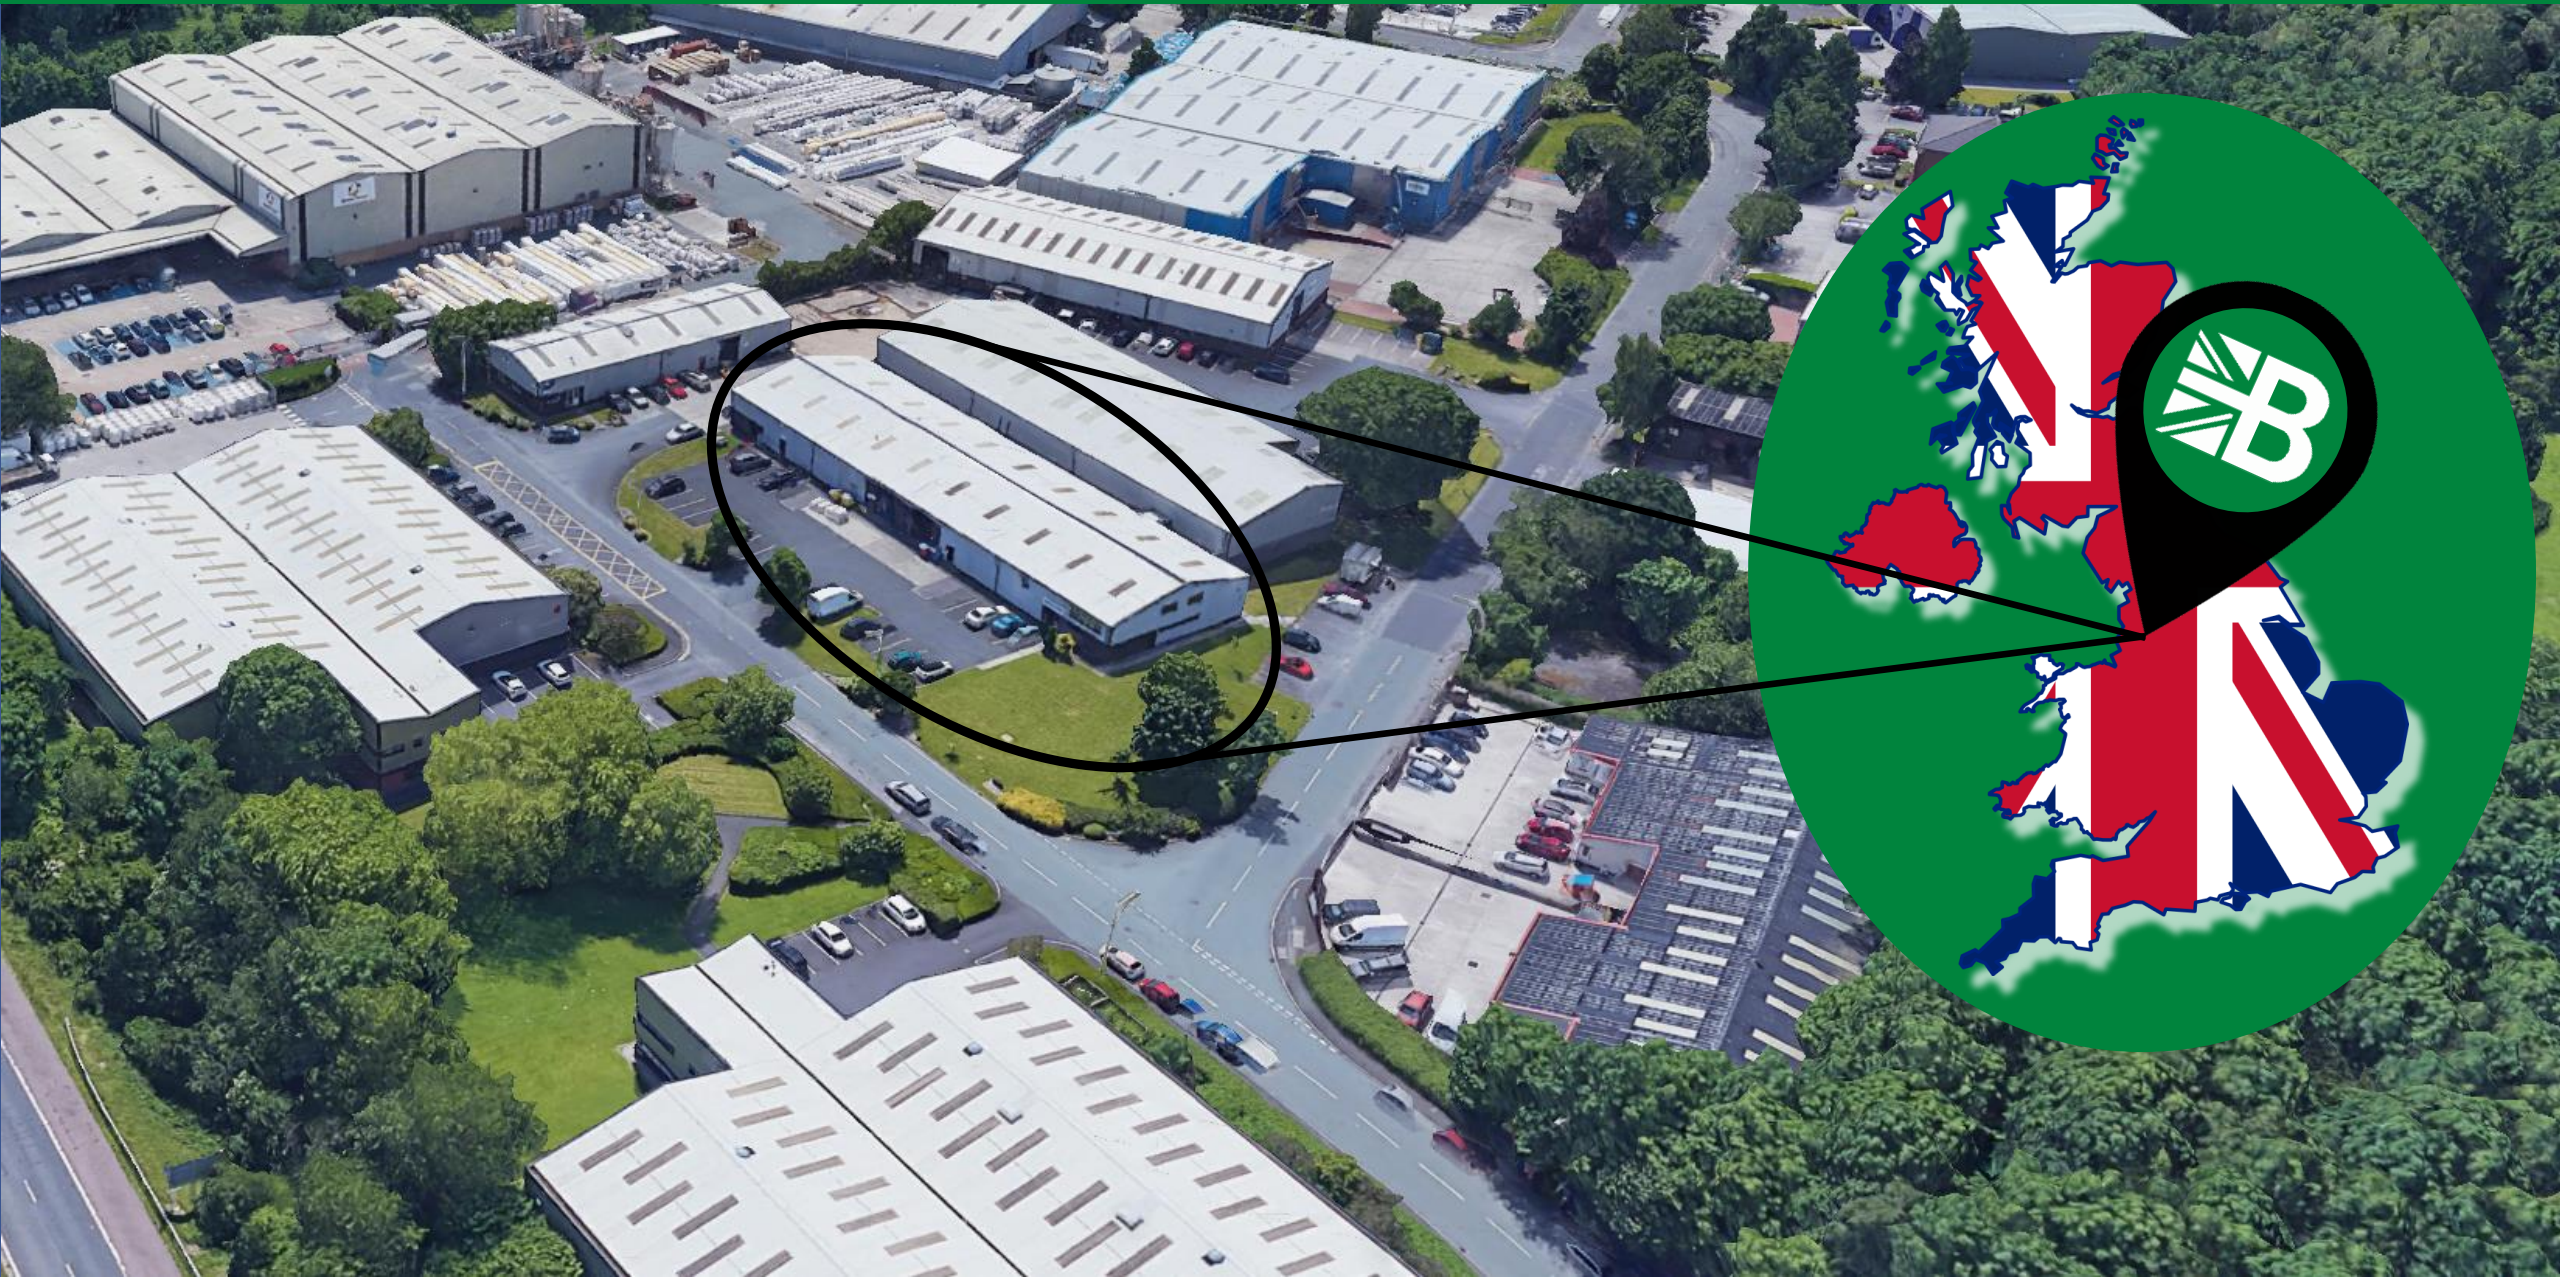



**Duragun**  
**pro**