

SmartWeight® Pro

Intuitive balancer with professional features

NEW OPTIONS



Key features at a glance

PATENT PENDING


No-touch wheel measurement



- ✓ Ergonomic design
- ✓ More durable than Dataset® arms
- ✓ Full wheel measurement without contact

PATENTED

SmartWeight® technology



- ✓ Improves balance
- ✓ Minimizes weight usage
- ✓ Maximizes productivity

STANDARD

Intuitive interface



- ✓ Single-knob navigation simplifies experience
- ✓ 3D graphics





STANDARD, PATENT PENDING

ExactPosition™



- ✓ Laser exactly identifies weight location
- ✓ Improves balance accuracy
- ✓ More durable than Dataset® arms

PATENTED

CenteringCheck®



- ✓ Ensures proper centering
- ✓ Eliminates setup errors and most common cause of comebacks

OPTIONAL

HammerHead® option



- ✓ Speeds clip-weight placement
- ✓ Improves balance
- ✓ Illuminates work area

EXCLUSIVE

On-demand videos



- ✓ Simplifies training
- ✓ Improves results
- ✓ Multiple languages



SWP70E shown with optional BullsEye® collet kit, HammerHead® top-dead-center laser, and wheel lift



EXCLUSIVE

Space-saving design

- ✓ Small-format maximizes shop space
- ✓ Hood design allows machine to be installed against wall



No-touch measurement makes balancing easier

STANDARD, PATENT PENDING

Easily determine weight placement using laser vision system

- ✓ Simple dimension entry
- ✓ Automatic weight mode selection
- ✓ Indicates exact weight placement
- ✓ Eliminates most common cause of weight-chasing



OPTIONAL

Outer laser vision system

- ✓ Automatically measure wheel width as hood is lowered
- ✓ Improves balance accuracy



Achieve the best balance with SmartWeight®

Save time & effort

- ✓ Single-weight solutions as much as **60% of the time**.
- ✓ Saves labor versus traditional two-weight solutions

Accommodate many wheel types

- ✓ Flanged or flangeless
- ✓ Plastic clad
- ✓ Colored rims
- ✓ Wider widths
- ✓ Run flats



Stop chasing weights



- ✓ Superior balance results in a single spin

How does SmartWeight® deliver the best balance?

Separates hop & wobble
imbalance forces

Assigns a lower threshold
to hop forces, similar to
manufacturer facilities

Hop
(static)



Wobble
(couple)



This provides the **best balance** as
modern vehicles are far more sensitive
to hop than wobble.

Improves appearance



- ✓ Smaller weights are less visible
- ✓ Places weights on inside of wheel when possible



Track labor & weight savings

- ✓ Labor savings shown in minutes and hours as well as dollars with every spin.

Reduce weight usage

- ✓ **30% less weight used**
- ✓ Save money on every balance



Did you know?

Modern vehicles are approximately 4 times more sensitive to hop forces than wobble. Conventional balancers treat both the same.



EXCLUSIVE

Single-knob interface simplifies experience

50g

Clearly indicates
correction weight amount




Rim cutaway displays selected
weight mode




Switch text language


Balancing interface at a glance



Display rim dimensions

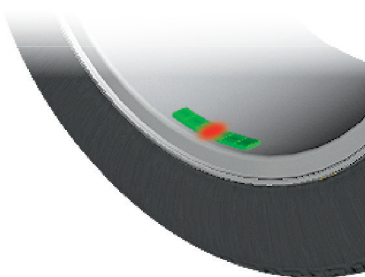

TruWeight® provides lifelike
representations of actual
correction weights

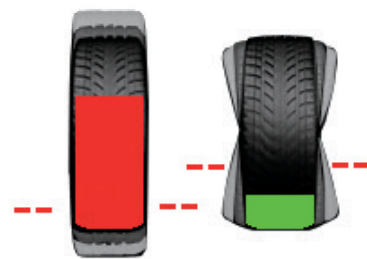

SmartWeight® panel displays
wheel balance condition

Popular equipment upgrades

NEW OPTION!

SpeedClamp

- ✓ Faster operation
- ✓ Consistent clamping force
- ✓ More efficient balancing



Wheel lift

- ✓ Safely service heavy, oversized wheels
- ✓ Aids wheel centering
- ✓ Helps retain techs



PATENTED

HammerHead® top-dead-center laser

- ✓ Greater weight placement accuracy
- ✓ More single-spin balances improve productivity
- ✓ Overhead light illuminates work area

BullsEye® centering system

- ✓ Optimize centering
- ✓ Prevent wheel damage




Ergonomic QuickNut

- ✓ Fast clamping with collapsing jaws
- ✓ Comfort-grip handles



Basic collet kit

- ✓ Handles most common wheel sizes
- ✓ Prevent wheel damage



Specifications


Power requirements	196-256V, 3 amp, 50/60 Hz, 1 ph (Power cable includes: NEMA 20 amp plug, L6-20P)
Air supply requirements*	7-12 bar (100-175 psi)
Capacity	
Rim width	38 – 508 mm (1.5 – 20 in.)
Rim diameter	254 – 762 mm (10 – 30 in.)**
ALU	191 – 965 mm (7.5 – 38 in.)**
Max. tyre diameter	965 mm (38 in.)
Max. tyre width	508 mm (20 in.)
Max. tyre weight	68kg (150 lbs..)
Imbalance resolution	± 1.0 g (0.05 oz)
Placement accuracy	512 positions, ± 0.35°
Balancing speed	150 rpm
Motor	Programmable drive system and DC motor

* Wheel lift and SpeedClamp models only. ** Extreme wheel sizes may require manual data entry.



Ordering information

	SWP90E	SWP70E	SWP00E
Hood	✓	✓	
Outer laser	✓	✓	
Speed Clamp	✓		
Width (W)	53" (1346 mm)	53" (1346 mm)	42" (1066 mm)
Height (H)	71.5" (1816 mm)	71.5" (1816 mm)	61" (1549 mm)
Depth (D)	32.75" (832 mm)	32.75" (832 mm)	28" (711 mm)
Weight	311 lbs. (141 kg)	311 lbs. (141 kg)	288 lbs. (131 kg)

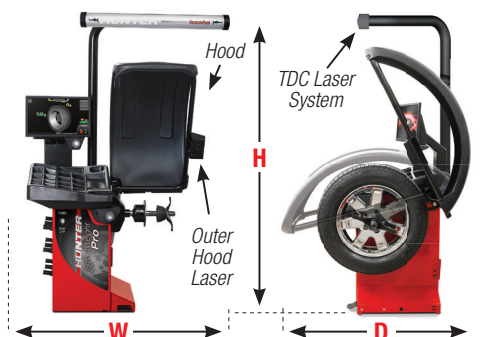

SWP70E

shown with optional HammerHead®
top-dead-center laser

Optional equipment

- 20-3062-1** Basic collet kit
- 20-3495-1** HammerHead® top-dead-center laser
- 20-3101-1** Wheel lift
- 20-2747-1** BullsEye® collet kit
- 76-574-2** Ergonomic QuickNut
- 20-1839-1** Flange plate



HUNTER
Engineering Company

www.hunter.com

11250 Hunter Drive, Bridgeton, MO 63044, USA
Tel: 1-314-731-3020, Fax: 1-314-731-0132
Email: international@hunter.com