

Pro**Meister**



User Guide

Oil Drain Plug Repair Kit (64 Pcs)

Art. Nr: PT5353

Produced in Taiwan for Bileko

Bileko

P.O. Box 542

S-645 25 Strängnäs, Sweden

Tel: +46 771 72 00 00

www.promeister.com

RVNR.01


Features

- Kit for repairing damaged, stripped, or worn drain plug hole by enlarging the threads with taps provided and new (and bigger) drain plugs with copper washers
- Includes four sizes for common vehicle makes


Specifications

All figures listed below, unless otherwise stated, are in millimeter (mm)


Taps (1 pc each size)

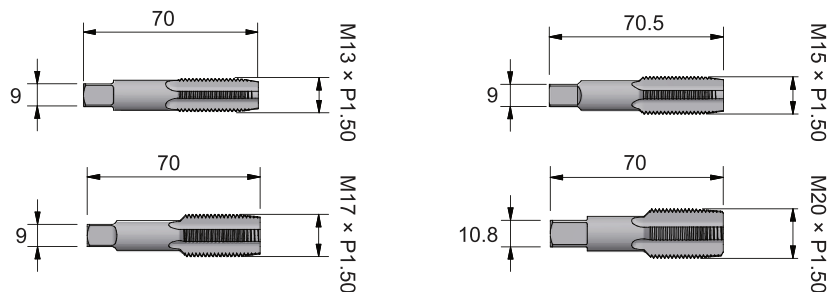

Drain Plugs (5 pcs each size)

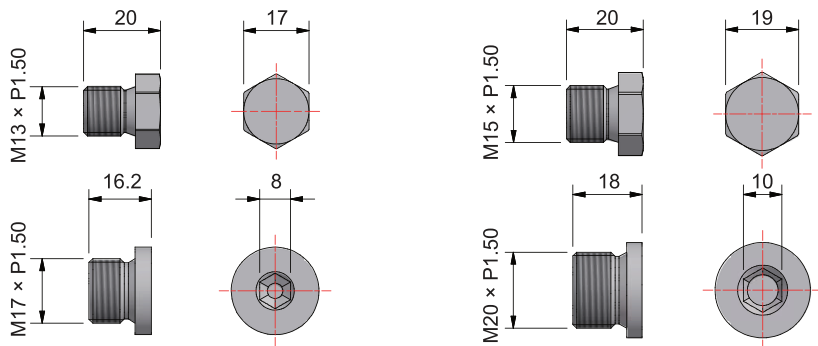

Drain Plugs (5 pcs each size)

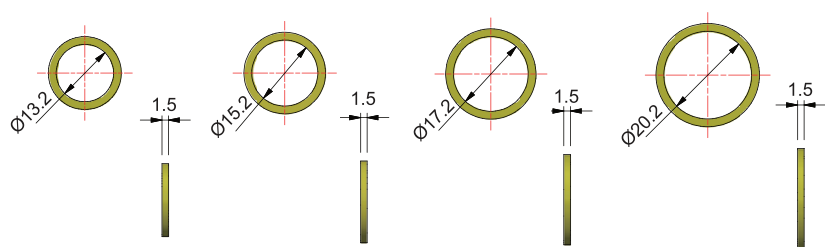

Tap Material	SKS 3
Tap Hardness	HRC 55-58
Plug Material	S15C

Plug Surface	Zinc Plating
Plug Hardness	HRC 55-58
Washer Material	Copper

Safety Precautions



- Always read the instructions carefully before using the tool
- DO NOT use an air/impact wrench to work with the tool
- Ensure the working area has adequate lighting
- Keep children and unauthorized persons away from the working area
- Keep working area clean and tidy, dry and free from unrelated materials
- DO NOT allow untrained persons to use this tool kit
- Always wear eye protection that meets OSHA and ANSI Z87.1 standards
- Always wear gloves when working with the tool
- Always wear ear protection
- Disposal: Customers should follow local regulations to handle used/wasted parts

Instructions

1. Remove the drain plug.
2. Use the tap to create new threads on oil drain plug hole (Fig. 1).
3. Clean the drain plug hole.
4. Insert a new washer on the new drain plug provided, and connect the drain plug to the re-threaded drain plug hole.

